

Geleiding 75%, belasting 20 kg, type DS2728 (RVS)

- Geleider heeft een weerstand tegen openen
- Zeer smalle geleiders (breedte slechts 9,5 mm)



Geleiding:
75%



Belasting per paar:
tot 20 kg




Aantal cycli
dynamische test



Maximale belasting
horizontaal gemonteerd



Materiaal:
roestvaststaal 304

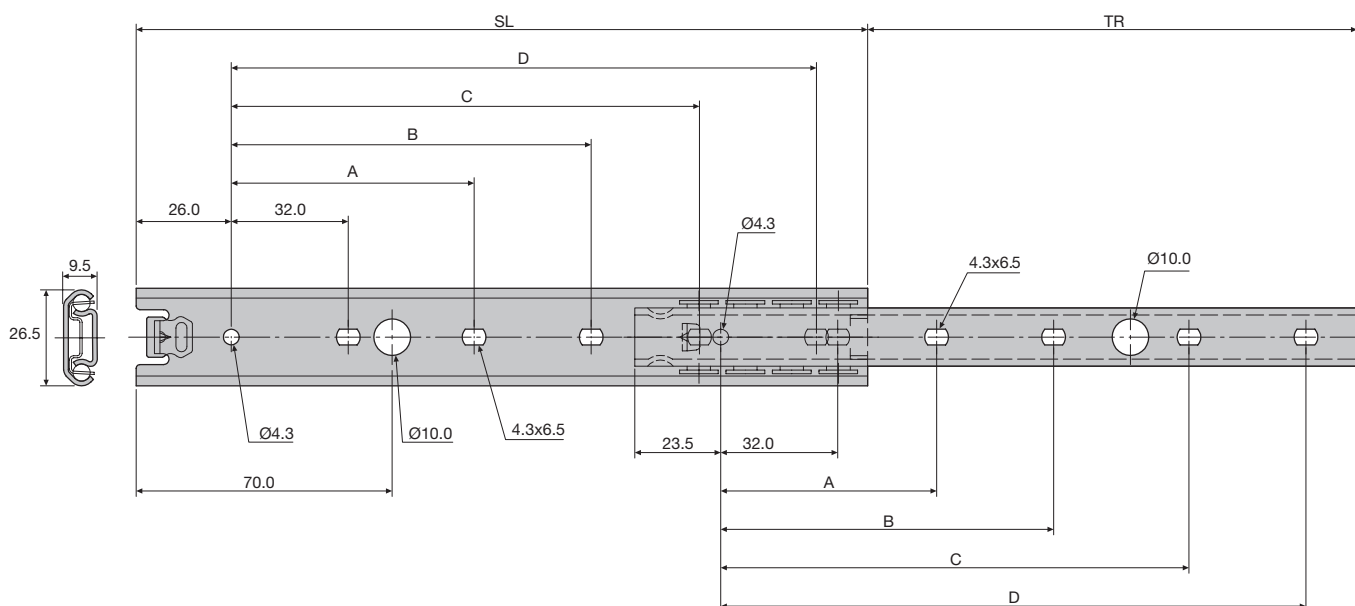

Bestelnummer per paar	mm						kg	
	SL	TR±3	A	B	C	D	W	L
199262	250	170	-	-	160	192	0.32	15
199278	300	208	128	-	224	256	0.39	18
199324	350	245	128	-	256	288	0.45	20
199296	400	283	160	192	320	352	0.52	20
199266	450	320	160	192	384	416	0.59	20
199325	490	347	192	224	416	448	0.63	18

SL: Lengte geleider

W: Gewicht geleiders per paar in kg

TR: Uitschuiflengte geleider

L: Belasting per paar

- Om de aangegeven maximale belasting te bereiken, dienen alle montageposities gebruikt te worden.
- Voor montage worden M4/4 mm schroeven aanbevolen, met een max. kophoogte van 2.5 mm en max. kop ø9.6 mm.