


Geleiding 100%+, belasting 60 kg, type 3320-50

- Geleider heeft een weerstand tegen openen
- Binnendeel geleider is uitneembaar
- Bajonet (klik-in) montage voor in metalen behuizingen



Geleiding:
100% +

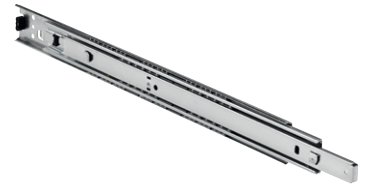




Belasting per paar:
tot 60 kg



Aantal cycli
dynamische test



Materiaal:
verzinkt staal

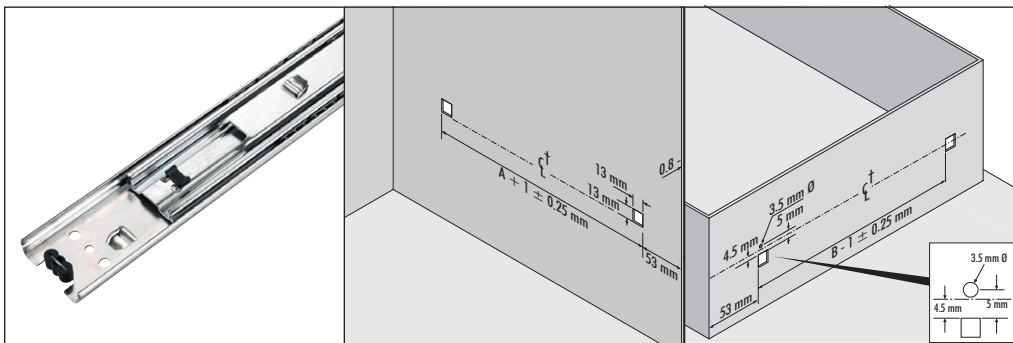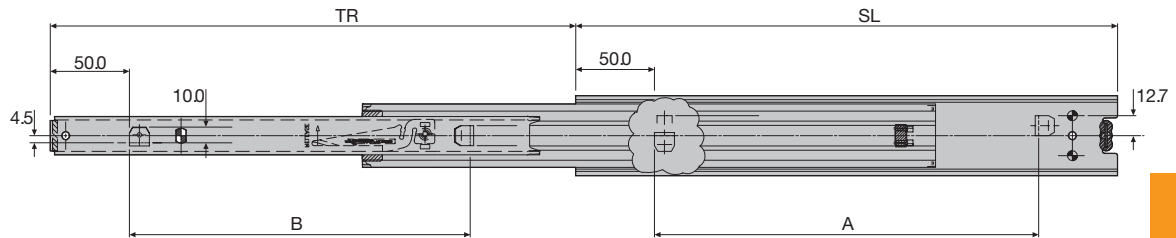

Bestelnummer per paar	mm				kg	
	SL	TR	A	B	W	L
190034	300	325	200	200	1.23	55
199361	350	374	250	250	1.45	57
199368	400	424	300	300	1.66	58
199468	450	473	350	350	1.87	59
199374	500	522	400	400	2.07	60
190720	550	571	450	450	2.29	60
199469	600	620	500	500	2.52	59
199470	650	670	550	550	2.72	57
199471	700	731	600	600	2.93	55

SL: Lengte geleider

W: Gewicht geleiders per paar in kg

TR: Uitschuiflengte geleider

L: Belasting per paar

- Om de aangegeven maximale belasting te verkrijgen, dienen alle montageposities gebruikt te worden.
- Bajonet (klik-in) montage voor in metalen behuizingen met een wanddikte van 0,8 tot 1,2 mm.
- Alleen geschikt voor verticale montage.