


RVS

**Zeskant, open,
platkop en
gereduceerde
verzonken kop**



**Standaard
(< 1mm)**

- Materiaal: Roestvaststaal (A2)
- Schroefdraad: Metrisch
- Toepasbaar in combinatie met een chemisch borgmiddel
- Geschikt voor gebruik in plaatdikte < 1mm

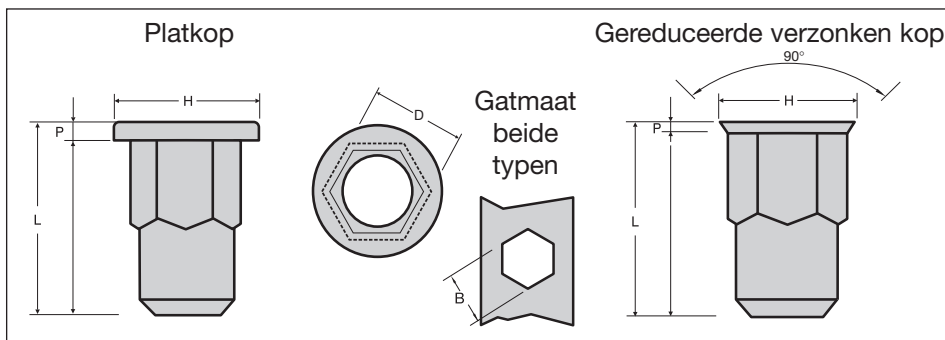

Artikelnummer platkop	Draad- soort	 B +0,1/-0,0	Plaatdikte		Afmetingen			
			Min.	Max.	D	H ø	P	L
113546	M 4	6,1	0,5	3,0	6,0	9,5	1,1	13,0
113547	M 5	7,1	0,5	3,0	7,0	10,5	1,1	14,5
113548	M 6	9,1	0,5	3,0	9,0	12,5	1,6	17,0
113549	M 8	11,1	0,5	3,0	11,0	14,5	1,6	19,0
113550	M 10	13,1	0,8	3,5	13,0	16,5	2,1	22,5

Artikelnummer gereduceerde verzonken kop	Draad- soort	 B +0,1/-0,0	Plaatdikte		Afmetingen			
			Min.	Max.	D	H ø	P	L
113551	M 4	6,1	0,5	3,0	6,0	7,0	0,9	12,5
113552	M 5	7,1	0,5	3,0	7,0	8,0	0,9	14,0
113553	M 6	9,1	0,5	3,0	9,0	10,0	0,9	16,0
113554	M 8	11,1	0,5	3,0	11,0	12,0	0,9	17,0
113555	M 10	13,1	0,8	3,5	13,0	14,5	1,1	20,0